

Datasheet Sensirion SCD30 Sensor Module

CO₂, humidity, and temperature sensor

- NDIR CO₂ sensor technology
- Integrated temperature and humidity sensor
- Best performance-to-price ratio
- Dual-channel detection for superior stability
- Small form factor: 35 mm x 23 mm x 7 mm
- Measurement range: 400 ppm – 10.000 ppm
- Accuracy: $\pm(30 \text{ ppm} + 3\%)$
- Current consumption: 19 mA @ 1 meas. per 2 s.
- Energy consumption: 120 mJ @ 1 measurement
- Fully calibrated and linearized
- Digital interface UART or I²C



Product Summary

CMOSens® Technology for IR detection enables carbon dioxide measurements of the highest accuracy at a competitive price.

Along with the NDIR measurement technology for detecting CO₂ comes a best-in-class Sensirion humidity and temperature sensor integrated on the very same sensor module. Ambient humidity and temperature can be measured by Sensirion's algorithm expertise through modelling and compensating of external heat sources without the need of any additional components. The very small module height allows easy integration into different applications.

Carbon Dioxide is a key indicator for indoor air quality. Thanks to new energy standards and better insulation, houses have become increasingly energy-efficient, but the air quality can deteriorate rapidly. Active ventilation is needed to maintain a comfortable and healthy indoor environment, and improve the well-being and productivity of the inhabitants. Sensirion sensor solutions offer an accurate and stable monitoring of CO₂ in the air, as well as temperature and humidity. This enables our customers to develop new solutions that increase energy efficiency and simultaneously support the well-being of everyone.

SCD30 is still under development. Thus any specification is subject to change without prior notice.

Benefits of Sensirion's CMOSens® Technology

- High reliability and long-term stability
- Industry-proven technology with a track record of more than 10 years
- Designed for mass production
- Optimized for lowest cost
- Low signal noise

Content

1 Sensor Specifications	3
2 Package Outline Drawing	4
3 Pin-Out Diagram	4
4 Operation and Communication	5
5 Shipping Information	5
6 Important Notices	6
7 Headquarters and Subsidiaries	7
Revision History	7

Preliminary Specification

1 Sensor Specifications¹

Preliminary information. Subject to change without notice.

CO₂ Sensor Specifications

Parameter	Conditions	Value
CO ₂ measurement range	-	0 – 40'000 ppm
Accuracy ²	400 ppm – 10'000 ppm	± (30 ppm + 3%)
Repeatability ³	400 ppm – 10'000 ppm	10 ppm
Temperature stability ⁴	T = 0 ... 50°C, 400 ppm – 10'000 ppm	2.5 ppm / °C
Response time ⁵	$\tau_{63\%}$	20 s

Table 1: SCD30 CO₂ sensor specifications

Humidity Sensor Specifications⁶

Parameter	Conditions	Value
Humidity measurement range	-	0 %RH – 100 %RH
Accuracy ⁷	0 – 50°C, 0 – 100%RH	±2 %RH
Repeatability ³	-	0.1 %RH
Response time ⁵	$\tau_{63\%}$	8 s

Table 2: SCD30 humidity sensor specifications

Temperature Sensor Specifications⁶

Parameter	Conditions	Value
Temperature measurement range	-	-40°C – 120°C
Accuracy ⁷	0 – 50°C	±0.5°C
Repeatability ³	-	0.1°C
Response time ⁸	$\tau_{63\%}$	> 2 s

Table 3: SCD30 temperature sensor specifications

Electrical Specifications

Parameter	Conditions	Value
Average current ⁹	Update interval 2 s	19 mA
Max. current	During measurement	75 mA
Energy consumption	1 measurement	120 mJ

Table 4 SCD30 electrical specifications

¹ Default conditions of T = 25°C, p = 1013 mbar, V_{DD} = 3.3 V, continuous measurement mode with measurement rate = 2 s apply to values listed in the tables, unless otherwise stated.

² Deviation to a high-precision reference. Accuracy is fulfilled by >90% of the sensors after calibration. Rough handling, shipping and soldering can falsify the measurements. Specification is valid in the range 400 ppm – 10000 ppm. Accuracy is based on tests with gas mixtures having a tolerance of ±1.5%.

³ RMS error of consecutive measurements at constant conditions. Repeatability is fulfilled by >90% of the sensors.

⁴ Average slope of CO₂ accuracy, valid at 400ppm. Fulfilled by >90% of the sensors after calibration.

⁵ Time for achieving 63% of a respective step function. Response time depends on design-in, heat exchange and environment of the sensor in the final application.

⁶ Design-in of the SCD30 in final application and the environment impacts the accuracy of the RH/T sensor. Heat sources have to be considered for optimal performance.

⁷ Deviation to a high-precision reference. Accuracy is fulfilled by >90% of the sensors after calibration.

⁸ Time for achieving 63% of a respective step function. Response time depends on design-in, heat exchange and environment of the sensor in the final application.

⁹ Average current including idle state and processing. Other update rates and polling mode for small power budgets can be selected via the digital interface.

Operation Conditions

Parameter	Conditions	Value
Operating temperature range	-	0 – 50°C
DC supply voltage	-	3.3V – 5.5V
Interface	-	UART and I2C

Table 5: SCD30 operation conditions

2 Package Outline Drawing

Preliminary information. Subject to change without notice.

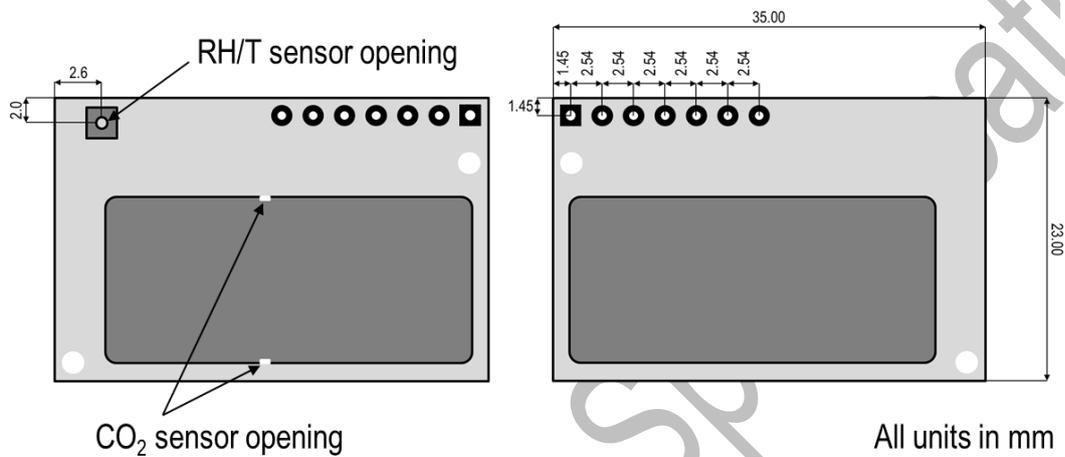


Figure 1 Product outline drawing of SCD30

Sensor height is 7 mm at the thickest part of the optical capsule.

3 Pin-Out Diagram

Preliminary information. Subject to change without notice.

Pin	Comments
VDD	Supply Voltage
GND	Ground
TX/ SCL	Transmission line Modbus (Modbus not supported yet)/ Serial clock I2C
RX/ SDA	Receive line Modbus (Modbus not supported yet)/ Serial data I2C
RDY	Data ready pin. High when data ready for read-out
PWM	PWM output of CO ₂ concentration measurement (PWM not supported yet)
SEL	Interface select pin. Pull to VDD for selecting Modbus (Modbus not supported yet)

Figure 2: Pin-out of the SCD30.

4 Operation and Communication

Please contact your local Sensirion representative for separate document.

5 Ordering Information

SCD30 and accessory can be ordered via the following article numbers. Please accept longer lead times until official start of production.

Product	Description	Article Number
SCD30 sensor	CO ₂ , RH and T sensor module	1-101625-01
SCD30 evaluation kit	SCD30 sensor, SEK sensor bridge and cables.	tbd

SCD30 sensor is shipped in stackable trays carrying 40 pieces each.

Preliminary Specification

6 Important Notices

6.1 Warning, Personal Injury

Do not use this product as safety or emergency stop devices or in any other application where failure of the product could result in personal injury. Do not use this product for applications other than its intended and authorized use. Before installing, handling, using or servicing this product, please consult the data sheet and application notes. Failure to comply with these instructions could result in death or serious injury.

If the Buyer shall purchase or use SENSIRION products for any unintended or unauthorized application, Buyer shall defend, indemnify and hold harmless SENSIRION and its officers, employees, subsidiaries, affiliates and distributors against all claims, costs, damages and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if SENSIRION shall be allegedly negligent with respect to the design or the manufacture of the product.

6.2 ESD Precautions

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation, take customary and statutory ESD precautions when handling this product. See application note "ESD, Latchup and EMC" for more information.

6.3 Warranty

SENSIRION warrants solely to the original purchaser of this product for a period of 12 months (one year) from the date of delivery that this product shall be of the quality, material and workmanship defined in SENSIRION's published specifications of the product. Within such period, if proven to be defective, SENSIRION shall repair and/or replace this product, in SENSIRION's discretion, free of charge to the Buyer, provided that:

- notice in writing describing the defects shall be given to SENSIRION within fourteen (14) days after their appearance;
- such defects shall be found, to SENSIRION's reasonable satisfaction, to have arisen from SENSIRION's faulty design, material, or workmanship;
- the defective product shall be returned to SENSIRION's factory at the Buyer's expense; and
- the warranty period for any repaired or replaced product shall be limited to the unexpired portion of the original period.

This warranty does not apply to any equipment which has not been installed and used within the specifications recommended by SENSIRION for the intended and proper use of the equipment. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH HEREIN, SENSIRION MAKES NO WARRANTIES, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT. ANY AND ALL WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED AND DECLINED.

SENSIRION is only liable for defects of this product arising under the conditions of operation provided for in the data sheet and proper use of the goods. SENSIRION explicitly disclaims all warranties, express or implied, for any period during which the goods are operated or stored not in accordance with the technical specifications.

SENSIRION does not assume any liability arising out of any application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. All operating parameters, including without limitation recommended parameters, must be validated for each customer's applications by customer's technical experts. Recommended parameters can and do vary in different applications.

SENSIRION reserves the right, without further notice, (i) to change the product specifications and/or the information in this document and (ii) to improve reliability, functions and design of this product.

Copyright© 2017, by SENSIRION.
CMOSens® is a trademark of Sensirion
All rights reserved

7 Headquarters and Subsidiaries

Sensirion AG

Laubisruestr. 50
CH-8712 Staefa ZH
Switzerland

phone: +41 44 306 40 00
fax: +41 44 306 40 30
info@sensirion.com
www.sensirion.com

Sensirion Taiwan Co. Ltd

phone: +886 3 5506701
info@sensirion.com
www.sensirion.com

Sensirion Inc., USA

phone: +1 312 690 5858
info-us@sensirion.com
www.sensirion.com

Sensirion Japan Co. Ltd.

phone: +81 3 3444 4940
info-jp@sensirion.com
www.sensirion.co.jp

Sensirion Korea Co. Ltd.

phone: +82 31 337 7700~3
info-kr@sensirion.com
www.sensirion.co.kr

Sensirion China Co. Ltd.

phone: +86 755 8252 1501
info-cn@sensirion.com
www.sensirion.com.cn

To find your local representative, please visit www.sensirion.com/distributors

Revision History

Date	Version	Page(s)	Changes
April 2017	0.1, 0.2	all	Initial Version
May 2017	0.3	all	minor revision
July 2017	0.4	3, 4	POD and Pin out added,
August 2017	0.5	all	Minor review
September 2017	0.6	all	Release for B samples, document cleared from prototype samples.
November 2017	0.7	4	Specs update
Januar 2018	0.8	all	Preliminary version released.